


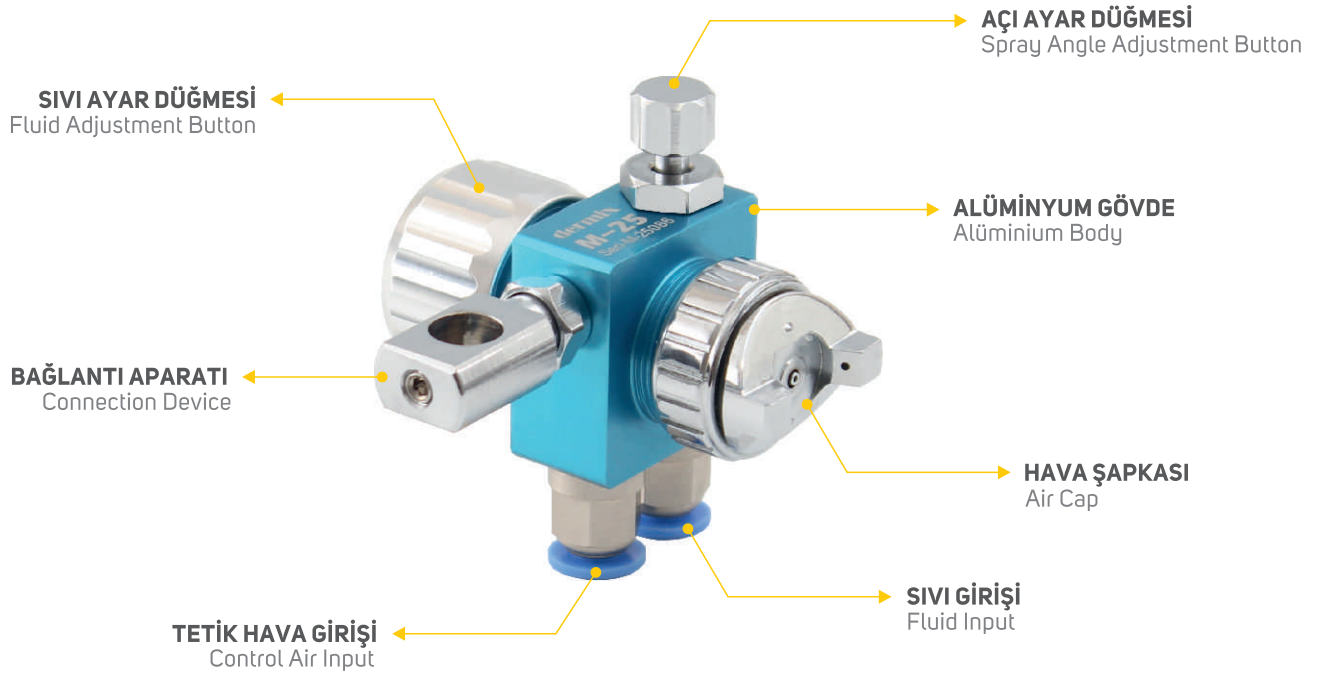

DÜŞÜK BASINÇ HAVALI Otomatik Püskürtme Tabancası

Low Pressure Airspray Automatic Spray Gun

M25

dermix®

TEKNİK ÖZELLİKLER

Technical Properties

ÇALIŞMA BASINCI	Working Pressure	: 3 Bar
SIVI BASINCI	Fluid Pressure	: 0.2 - 2 Bar
HAVA BASINCI	Air Pressure	: 3 - 6 Bar
TETİK HAVA GİRİŞİ	Valve Air Input	: 1/8"
SIVI GİRİŞİ	Liquid Input	: 1/8"
ÖLÇÜLER (E x B x Y)	Dimensions (W x L x H)	: 35 x 50 x 66 mm
AĞIRLIK	Weight	: 173 gr
İĞNE SEÇENEKLERİ	Needle Options	: 0.8 - 1.0 - 1.2 mm

KULLANIM ALANLARI

Applications


• KALIP YAĞLAMA ÜNİTELERİ	Mold Lubrication Systems
• NEMLENDİRME SİSTEMLERİ	Moistening Systems
• HATA KONTROL ÜNİTELERİ	Error Check Systems
• BOYAMA HATLARI	Paint Lines
• KAPLAMA SİSTEMLERİ	Covering Systems
• YAPIŞTIRICI PÜSKÜRTME	Adhesive Spraying
• SOĞUTMA SİSTEMLERİ	Cooling Systems
• GENEL YAĞLAMA SİSTEMLERİ	General Lubrication Systems

DETAYLAR

Details

ERGONOMİK BOYUTLAR

Ergonomic Dimensions

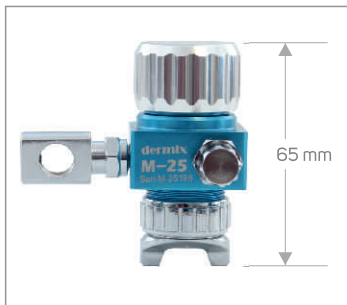

PÜSKÜRTME GENİŞLİK AYARI

Spray Width Setting



HASSAS SIVI AYARI

Precision Fluid Setting

